



AVK-N1200

CE | FC


IP NETWORK PTZ KEYBOARD CONTROLLER

OVERVIEW

- Supports remote upgrading by Web client
- Seamless integration with CVMS
- Supports PTZ mode, Serial Port Mode, Platform Mode, up to 256 speed domes controllable in PTZ mode
- Supports playback control of TV wall clients
- Supports control of decoding videos
- Supports keypad tones

DIMENSIONS

Unit : inch(mm)

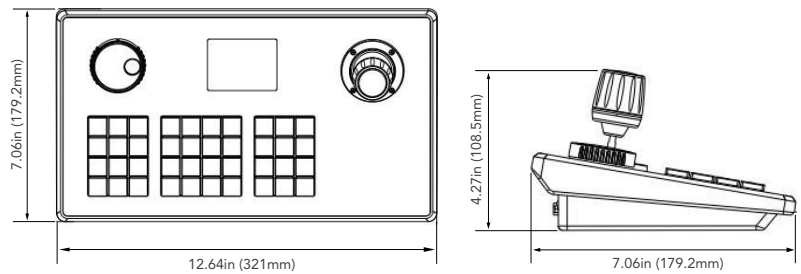

SPECIFICATIONS

LOCAL PARAMETERS	
Display	TFT LCD 320x240
Operation Interface	4D Joystick, Knob, Buttons
NETWORK PARAMETERS	
Interface	1 RJ45 10/100M adaptive Ethernet port
Control Mode	PTZ mode, Platform Mode, and Serial Port Mode
Network Management	The software can be upgraded by WEB Client
SERIAL PORT PARAMETERS	
Serial Port	RS422x1 / RS232x1
Baudrate	1200bps, 2400bps, 4800bps, 9600bps, 19200bps
OTHERS	
Power	DC12V 2A
PoE	Supports PoE Power Supply (IEEE802.3 af)
Power Consumption	≤5W
Working Temperature	14°~131°F (-10°~55°C)
Working Humidity	20~80% (non-condensing)
Storage Temperature	14°~140°F (-10°~60°C)
Storage Humidity	0~90% (non-condensing)
Dimensions	12.64in (321mm) × 7.06in (179.2mm) × 4.27in (108.5mm)
Net Weight	3.59lbs (1.63kg)