


AVM-JB-DUAL-US1

DUAL-CAMERA-JUNCTION BOX FOR FIXED LENS CAMERAS

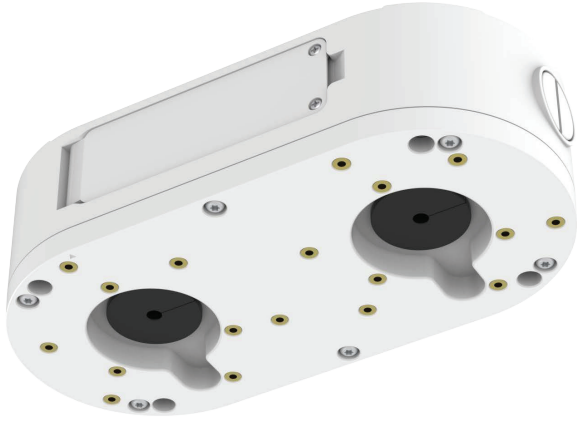

AVM-JB-DUAL-US1 DUAL-CAMERA-JUNCTION BOX

DUAL-CAMERA-JUNCTION BOX FOR FIXED LENS CAMERAS

The AVM-JB-DUAL-US1 is a junction box designed for use with our all Diversity Fixed lens Cameras except Indoor dome and mini dome models. The junction box is with built-in PoE Switch and available connect two compatible cameras of all types using only one cable. The junction box is available for wall or ceiling mounting.


NDA
COMPLIANT

FUNCTIONS

- Plastic plus 30% glass fiber
- Built-in PoE Switch
- Compatible with all Diversity Fixed lens Cameras (except Indoor dome and mini dome models.)
- Available for wall or ceiling mounting

DIMENSIONS

Unit : inch (mm)

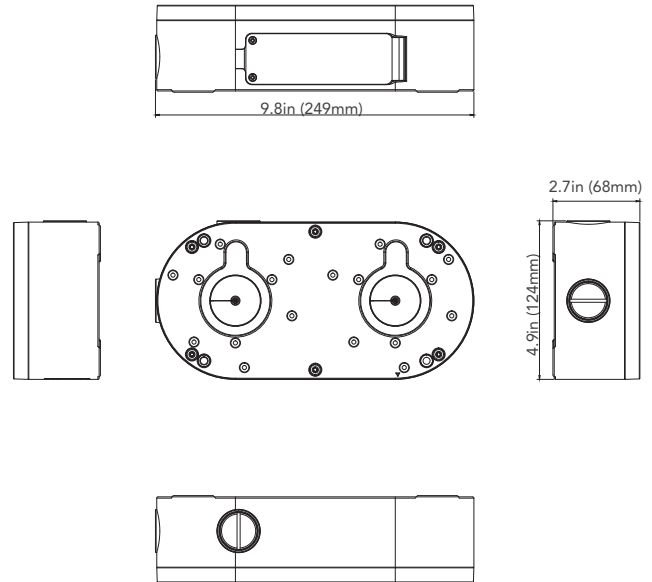

OPTIONAL ACCESSORIES



AVM-DUAL-CVR-S1
JUNCTION BOX COVER



AVM-DUAL-CVR-L1/S1 required
AVM-DUAL-WMT-L1
WALL MOUNT



AVM-PT-CMT-PM-L1
CEILING MOUNT



AVYCON[®]

AVM-JB-DUAL-US1

DUAL-CAMERA-JUNCTION BOX FOR FIXED LENS CAMERAS

SPECIFICATIONS

Operating System	
SOC	IP804+IP179NI
Network	
Interfaces	RJ45 ,10/100 ,200MBPOE -LAN+100MBPOE-WAN
LED	N/A
Network management	N/A
IEEE Standard	IEEE 802.3
MAC	3
Uplink port rate	100MP
Downlink port rate	100MP
Exchange capacity	1Gbps
Packet forwarding rate	0.744Mpps
Internal Cache	768Kbits
PoE	
PoE standard	IEEE 802.3at/af, (2 PoE for IPC power by af Max:15W, WAN for switcher power by at Max:30W)
Power supply	Support 1236 powering
PoE port	3 ports (customized cable with 3 waterproof connectors, 2 for IPC, 1 for switcher)
Extend (EPOE)	N/A
Max. port power supply rate	25W
Max. power supply rate of switch	30W
Max. power consumption of switch	5W
General	
shell	Plastic plus 30% glass fiber
Installation method	Wall hanging, ceiling
weight	N/A
Dimension	2.7" x 9.8" x 4.9"
Operating Temperature/Humidity	"Temperature : -22°F~+140°F (-30°C~+60°C), Humidity : Less than 90%RH"
Storage Temperature/Humidity	"Temperature : -40°F~+185°F (-40°C~+85°C), Humidity : Less than 90%RH"
Power Specifications	POE 30W (no electrical port, PoE power supply, connecting PoE switcher and PoE-NVR)
RJ45	4KV
Thunder Prevention	4KV



AVYCON[®]

Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

phone: 949-752-7606

email: info@avycon.com

social: @avycon_aivo

website: avycon.com