



AVN-S05-1E04G


4+1 PORTS GIGABIT NETWORK SWITCH

OVERVIEW

- IEEE802.3, IEEE 802.3u, IEEE 802.3ab, IEEE802.3z
- Provides 5 10/100/1000 Base-TX ports
- High back-plane bandwidth of 10Gbps
- 4K MAC address table
- IEEE802.3x Flow control
- Surge protection for power and data ports
- Plug and Play design - no configuration required
- EMI standards complies with FCC, CE class B

DIMENSIONS

Unit : inch(mm)

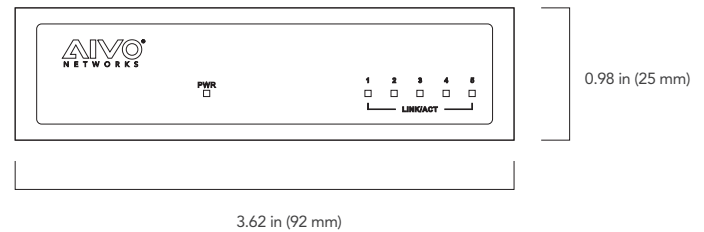

SPECIFICATIONS

DESCRIPTION	
Fixed Port	5 - 10 / 100 Base -TX ports, 2 Gigabit Combo Ports (SFP + RJ45)
LED Indicators	PWR, Speed, Link / Act VLAN LED
Input Voltage	100V ~ 240V AC, 50 / 60Hz
Network Media	10BASE-TX: UTP category 5, 5e cable (≤250m) 100BASE-TX: UTP category 5, 5e cable (≤150m) 1000BASE-TX: UTP category 5, 5e cable (≤150m)
Forwarding Rate	10BASE-T: 14880pps / port 100BASE-TX: 148800pps / port 1000BASE-TX: 148800pps / port
Power Consumption	3W
Power Supply	Row is missing from website [150W (250W optional)]
Operating Temperature	0°C ~ 40°C
Storage Temperature	-10°C ~ 70°C
Relative Humidity	20% ~ 85% (Non-Condensing)
Thermal Method	Fanless
Switching Capacity	10G
MAC Address	4K
Port Feature	Port Control
Port Mirroring	Supported
VLAN	4K VLANs
Traffic Control	IEEE 802.3x Full-Duplex flow control
Unit Size	92mm x 69mm x 25mm
Weight	350g (<4KG)
Packaged Contents	AVN-S05-1E04G - Network Switch User Manual Power Cord*1