





# **AVR-DSV808H**

NDAA | CE | FC


8 CH. 4K UHD DIGITAL VIDEO RECORDER 8MP / 5MP / 4MP / 1080P / 960P / 720P 4K HD OVER COAX & UTP

#### **OVERVIEW**

- H.265 codec decoding
- Full hybrid to support TVI/AHD/CVI/Analog/960H/IP cameras
- Up to 8MP(4K) resolution for preview and playback
- Support to install up to 1 HDD, max total capacity of up to 16TB
- Full function network remote view via Internet (CMS, IE/Firefox/Chrome, Mac Safari)
- No limitation on adding devices to CMS, max. 128 channels preview (CMSONE)
- Support scan P2P QR code to connect DVR via Mobile app (AVY Mobile One)
- Support to save pictures/video to Dropbox storage (Dropbox)
- Support to save pictures/video to FTP server (built by user)
- VGA/HDMI output up to 4K resolution
- Support HDD S.M.A.R.T. Monitoring
- Ability to convert up to 8 analog channels to have in total 12 IP channels (Total Bandwidth 12mbps)

#### **DIMENSIONS**

Unit: inch(mm)

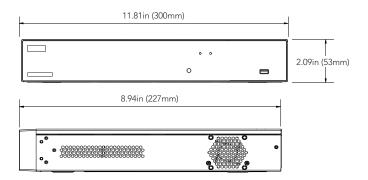

### **MOBILE APP**

AVY MOBILE ONE



## **REAR PANEL**







### **SPECIFICATIONS**

| VIDEO                               |   |
|-------------------------------------|---|
| Analog Video Input                  |   |
|                                     | 4CH, (only IP up to 12CH)   |
|                                     | 12CH, (Analog + IP)   |
| Output                              | HDMI x 1: EDID / 3840 x 2160(4K) / 2560 x 1440(2K) / 1920 x 1080 / 1440 x 900 / 1280 x 1024 / 1280 x 720 / 1024 x 768 |
|                                     | VGA x 1: 1920 x 1080 / 1440 x 900 / 1280 x 1024 / 1280 x 720 / 1024 x 768   |
|                                     | BNC x 1: 704 x 576  |
| Incoming Bandwidth (Mbps)           | 24Mbps~72Mbps   |
| Outgoing Bandwidth (Mbps)           | 72Mps   |
| Video Compression                   |   |
| Audio Compression                   |   |
| Installation Wizard                 | Yes   |
| HD Analog                           | 8MP @ 15fps / 5MP Lite @ 20fps / 4MP / 1080P / 960P / 720P  |
| IP                                  | 8MP / 5MP / 4MP / 1080P / 720P  |
| PLAYBACK                            |   |
| Playback Frame Rate                 | 8MP: 7fps, 5MP: 12fps, 4MP: 15fps, 1080P / 720P/ NTSC: 30fps (each CH)  |
| Smart Al                            | Yes   |
| Event Triggers                      | MD (Sensitivity Level 1~8), Video Loss, Beep, Email, Push Notification to Mobile App                                  |
| Playback Function                   | Fast forward / backward (2x, 4x, 8x,16x), Slow forward (1/2x, 1/4x, 1/8x,1/16x)                                       |
| Playback                            | Max 8CH playback  |
| INTERFACE                           |   |
| Local UI                            | UI5.0   |
| Web Monitoring                      | IE10/11, Safari V12.1 above, Firefox V.52 above, Chrome V.57 above, Edge V.79 above                                   |
| Mobile Viewer                       | AVY Mobile One  |
| Push Notification                   | Motion Event, AI, and Abnormal  |
| Password Reset                      | Password Reset (Hold 3 seconds), Factory Reset (Hold 8 seconds)   |
| HDD Interface                       | SATA x 1, Max 16TB HDD  |
| AI FEATURES                         |   |
| Perimeter Intrusion Detection (PID) | Yes   |
| Line Crossing Detection (LCD)       | Yes   |
| Pedestrian Detection and Vehicle    | No  |
| Detection (PD and VD)               |   |
| Stationary Object Detection (SOD)   | No  |
| Face detection (FD)                 | No  |
| Crossing Counting (CC)              | No  |
| Rare Sound Detection (RSD)          | Yes   |
| Video Tampering (VT)                | Yes   |
| License Plate Detection Enhance     | No  |
| (LPD)                               |   |
| Heatmap (HM)                        |   |
| Crowd Density Detection (CD)        |   |
| Queue Length Detection (QD)         |   |
| STSTEM                              |   |
| PoE                                 | N/A   |
| Ethernet                            | 1 RJ45 100 / 1000 Base-T  |
| USB                                 | USB 2.0 x 1 (Front Panel), USB 2.0 x 1 (Rear Panel)   |
| Audio                               | 8 IN / 1 OUT  |
| E-Sata                              | No  |
| RS485                               | 1   |
| Alarm Input/out                     | 8 IN / 1 OUT  |
|                                     |   |





#### **SPECIFICATIONS**

| GENERAL             |   |
|---------------------|---|
| OSD Language        | English and more                              |
| Power Consumption   | 11W (Without HDD)                             |
| Power Supply        | DC12V/2A                                      |
| Working Environment | 32°~104°F (0°~40° Celcius)                    |
| Working Humidity    | Less than 90%RH (Non-Condensing)              |
| Dimensions          | 11.81" × 8.94" × 2.09" (300mm x 227mm x 53mm) |

# **HDD OPTIONS**

- 1TB HDD: AVR-DSV508H-1T
- 2TB HDD: AVR-DSV508H-2T
- 3TB HDD: AVR-DSV508H-3T
- 4TB HDD: AVR-DSV508H-4T
- 6TB HDD: AVR-DSV508H-6T
- 8TB HDD: AVR-DSV508H-8T
- 10TB HDD: AVR-DSV508H-10T
- 12TB HDD: AVR-DSV508H-12T
- 14TB HDD: AVR-DSV508H-14T
- 16TB HDD: AVR-DSV508H-16T